

Primary Lithium Battery

ER14250

3.6V Lithium-thionyl chloride[Li-SOCl₂]
1/2AA-size bobbin cell



Benefits

- High and Stable Voltage
- Energy Density up to 590Wh/kg
- Long Shelf Life (less than 1% per year after 1 year of storage at +25°C)
- Wide Operating Temperature (-60°C~+85°C)

Key Features

- Stainless Steel Container
- Glass to Metal Hermetic Sealing
- Non-flammable Electrolyte
- CE, UL(MH10060) and UN38.3 Certified

Main Applications

- Security System
- Smart Metering
- RFID / IoT System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

Electrical Characteristics

Open circuit voltage (at 25°C) **≥3.65V**

Nominal capacity **1200mAh**

(At +25°C, battery discharged at continuous current 0.65mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

Maximum continuous current **40mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity.)

Maximum pulse discharge current **80mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity with max pulse for 3 seconds after 27 seconds break. The discharged capacity may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions, consult HCB.)

Storage (recommended) **≤+30°C**
(For more severe conditions, consult HCB) **≤75%RH**

Operating temperature range **-60°C~+85°C**

(Operation above ambient temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses, consult HCB.)

HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,
Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040
Tel: +86(0)27 83248452
Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com
Web: www.cnhcb.com
No.: HCB-MKT.PM-S[V1.0 2017 02]


Primary Lithium Battery ER14250

3.6V Lithium-thionyl chloride[Li-SOCl₂]
1/2AA-size bobbin 3.6V type

Physical Characteristics

Diameter	14.3±0.1mm
Height	24.7±0.5mm
Typical weight	10.0g
Lithium metal content	0.35g

MSDS as per request
Diode (1N4007, 1N5819)
PTC (SRS175...)
Tag, wire, connector, etc. available

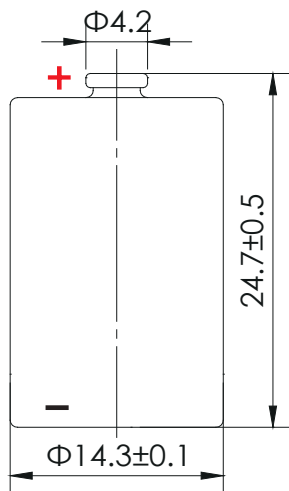


Dimensions in mm


WARNING:

- Do not short circuit
- Do not recharge
- Do not puncture
- Do not crush
- Do not dismantle
- Do not incinerate
- Do not mix new and used batteries
- Do not heat above 100°C


1. Typical discharge profiles at 25°C
(at the mid-discharge)

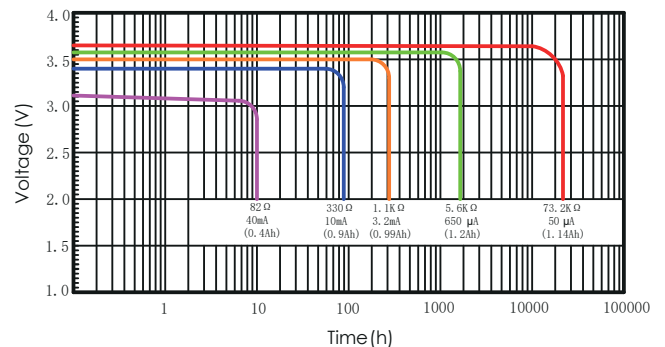

2. Voltage plateau versus Current and Temperature
(at the mid-discharge)

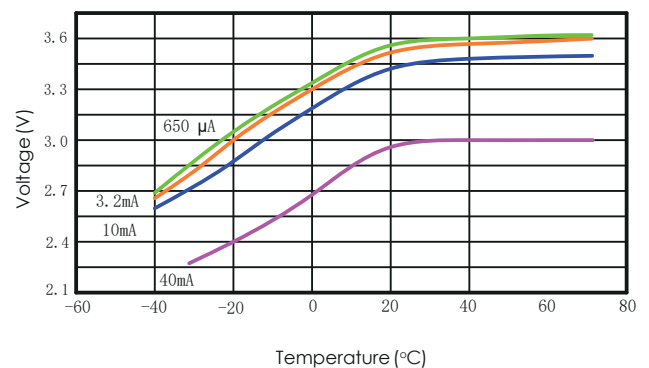

3. Storage characteristics

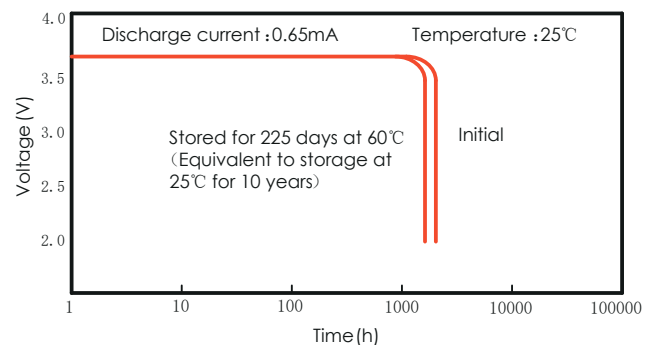

HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,
Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040
Tel: +86 (0) 27 83248452
Fax: +86 (0) 27 83248455

Email: haocheng@cnhcb.com
Web: www.cnhcb.com
Version No.: HCB-MKT. PM-S[V1.0 2017 02]vzvzv