

# Primary Lithium Battery ER26500

3.6V Lithium-thionyl chloride[Li-SOCl<sub>2</sub>]  
C-size bobbin cell



## Benefits

- High and Stable Voltage
- Energy Density up to 590Wh/kg
- Long Shelf Life (less than 1% per year after 1 year of storage at +25 °C)
- Wide Operating Temperature (-55°C ~+85°C)

## Key Features

- Stainless Steel Container
- Glass to Metal Hermetic Sealing
- Non-flammable Electrolyte
- CE, UL(MH10060) and UN38.3 Certified

## Main Applications

- Security System
- Smart Metering
- RFID / IoT System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

*New cell\*:*

*Refer to the cells that are stored within two months at no higher than +25°C.*

## Electrical Characteristics

Open circuit voltage (at 25°C) 3.65V

Nominal capacity 8500mAh  
(At +25°C, battery discharged at continuous current 2mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

Maximum continuous current 150mA  
(New cell\*, at +25°C, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity.)

Maximum pulse discharge current 250mA  
At +25°C, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity with max pulse for 3 seconds after 27 seconds break. The discharged capacity may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions, consult HCB.)

Storage (recommended) 30°C  
(For more severe conditions, consult HCB.) 75%RH

Operating temperature range -55°C~+85°C  
(Operation above ambient temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses, consult HCB.)

# Primary Lithium Battery ER26500



**HCB**  
昊诚锂电


3.6V Lithium-thionyl chloride[Li-SOCl<sub>2</sub>]  
C-size bobbin cell

## Physical Characteristics

Diameter	25.7±0.3mm
Height	49.2±0.5mm
Typical weight	53.0g
Lithium metal content	2.25g

MSDS as per request  
Diode (1N4007, 1N5819)  
PTC (SRS175...)

Tag, wire, connector, etc. available

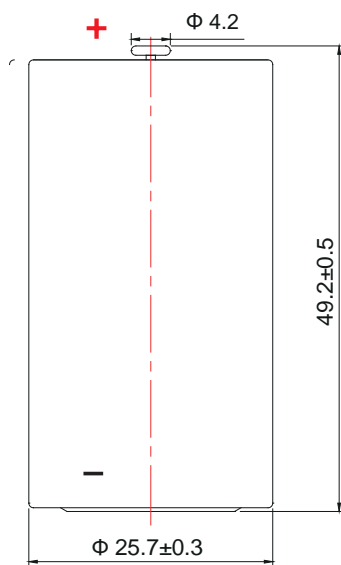


Dimensions in mm

## WARNING:


- Do not short circuit
- Do not recharge
- Do not puncture
- Do not crush
- Do not dismantle
- Do not incinerate
- Do not mix new and used batteries
- Do not heat above 100°C

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact HCB for the latest information


1. Typical discharge profiles at 25°C  
(at the mid-discharge)

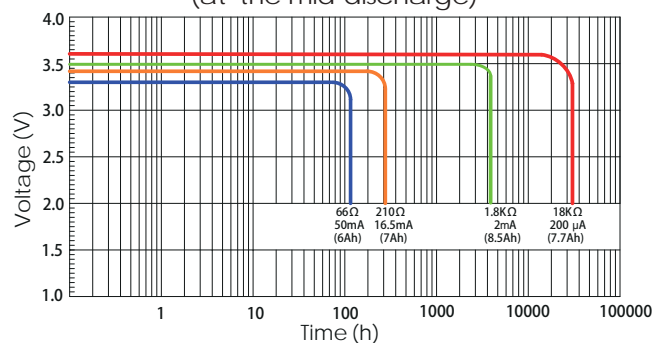

2. Voltage plateau versus Current and Temperature  
(at the mid-discharge)

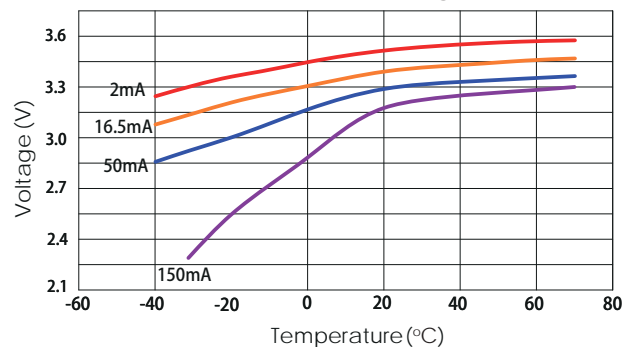

3. Storage characteristics

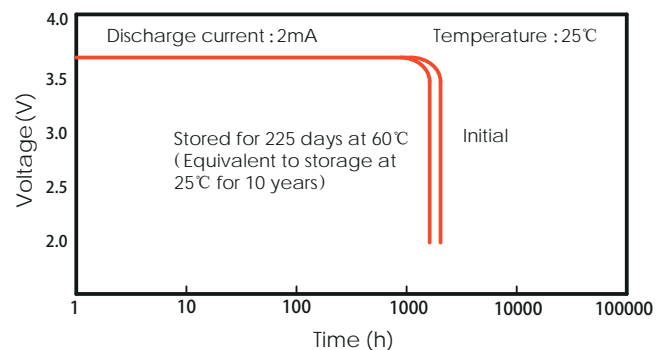

HCB BATTERY CO., LTD

Add: 37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China

P.O.: 430040

Tel: +86 (0) 27 83248452

Fax: +86 (0) 27 83248455

Email: haocheng@cnhcb.com

Web: www.cnhcb.com

Version No.: HCB-MKT. PM-S[V2.1 2024 04]