



Primary Lithium Battery ER341245

3.6V Lithium-thionyl chloride[Li-SOCl₂]
DD-size bobbin cell



Benefits

- High and Stable Voltage
- Energy Density up to 590Wh/kg
- Long Shelf Life (less than 1% per year after 1 year of storage at +25℃)
- Wide Operating Temperature (-55℃~+85℃)

Key Features

- Stainless Steel Container
- Glass to Metal Hermetic Sealing
- Non-flammable Electrolyte
- CE, UL(MH10060) and RoHS Certified

Main Applications

- Security System
- Smart Metering
- RFID / IoT System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

Electrical Characteristics

Open circuit voltage (at 25℃) ≥3.65V

Nominal capacity 36000mAh
(At +25℃, battery discharged at continuous current 4mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

Maximum continuous current 400mA
(At +25℃, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity.)

Maximum pulse discharge current 650mA
(At +25℃, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity with max pulse for 3 seconds after 27 seconds break. The discharged capacity may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions, consult HCB.)

Storage (recommended) ≤30℃
(For more severe conditions, consult HCB) ≤75%RH

Operating temperature range -55℃~+85℃
(Operation above ambient temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses, consult HCB.)

Primary Lithium Battery ER341245

3.6V Lithium-thionyl chloride[Li-SOCl₂]
DD-size bobbin cell



HCB
昊诚锂电

Physical Characteristics


Diameter (max)	34.2mm
Height (max)	125.2mm
Typical weight	200.0g
Lithium metal content	9.5g

MSDS as per request

Diode (1N4007, 1N5819)

PTC (SRS175...)

Tag, wire, connector, etc. available

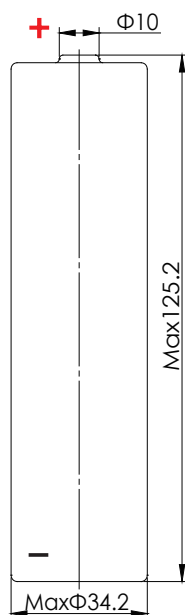


Dimensions in mm

WARNING:


- Do not short circuit
- Do not recharge
- Do not puncture
- Do not crush
- Do not dismantle
- Do not incinerate
- Do not mix new and used batteries
- Do not heat above 100°C

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact HCB for the latest information


1. Typical discharge profiles at 23±2°C
(at the mid-discharge)

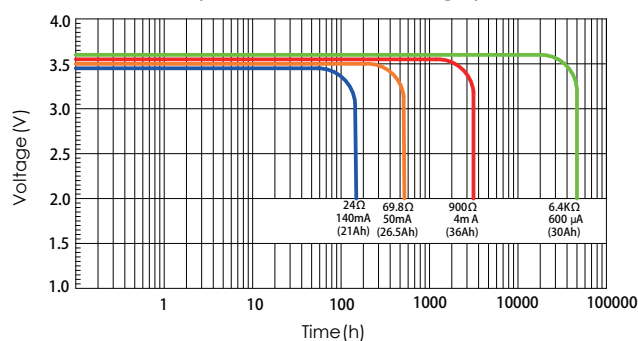

2. Voltage plateau versus Current and Temperature
(at the mid-discharge)

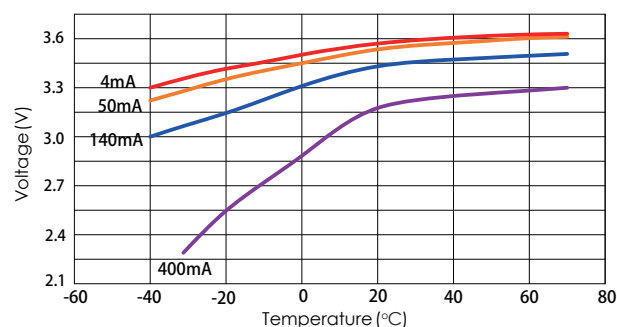

3. Storage characteristics

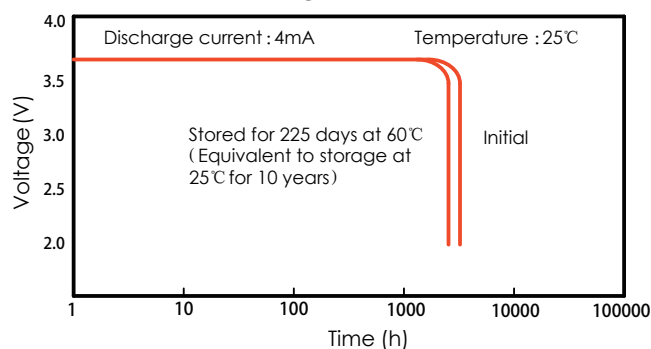

HCB BATTERY CO., LTD

Add: 37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China

P.O.: 430040

Tel: +86 (0) 27 83248452

Fax: +86 (0) 27 83248455

Email: haocheng@cnhcb.com

Web: www.cnhcb.com

Version No.: HCB-MKT. PM-5[V2.0 2023 05]