

Ultra Pulse Capacitor UPC1520



Key Features

- Hermetically Sealed
- Low Leak Current
- Long Shelf Life
- High Reliability
- Safe Design
- Wide Operating Temperature

Main Applications

- Smart Metering
- RFID Devices
- Communication Equipments
- Security System


UPC References Data

Electrical characteristics(23±2°C)	
Capacity at 3.67V	140As
at 3.90V	210As
Cut-off Voltage	2.5V
Maximum Continuous Discharge Current	0.5A
Maximum Pulse Discharge Current(1s)	2.0A
Maximum Charge Voltage	3.95V
Maximum Charge Current	50mA
Internal Resistance(RT@1kHz)	≤200mΩ
Leakage Current@RT	1uA
Leakage Current@80°C	5uA
For independent use	-40°C ~ +60°C
For ER+UPC use	-40°C ~ +85°C

Ultra Pulse Capacitor UPC1520

Physical characteristics

Diameter(max)	15.1mm
Height(max)	21.0mm
Typical weight	8.00g

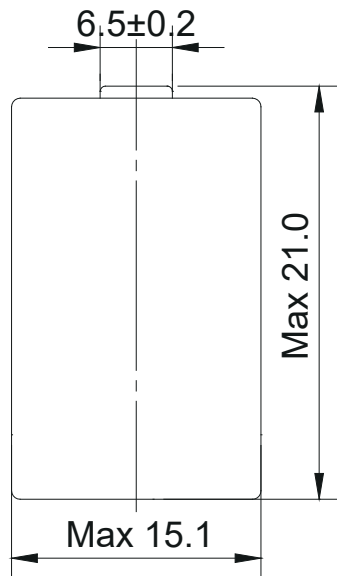


Dimensions in mm (GB1804-m)


WARNING:

- Do Not Short Circuit
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Heat Above 100°C


UPC1520 200mA Discharge Curve

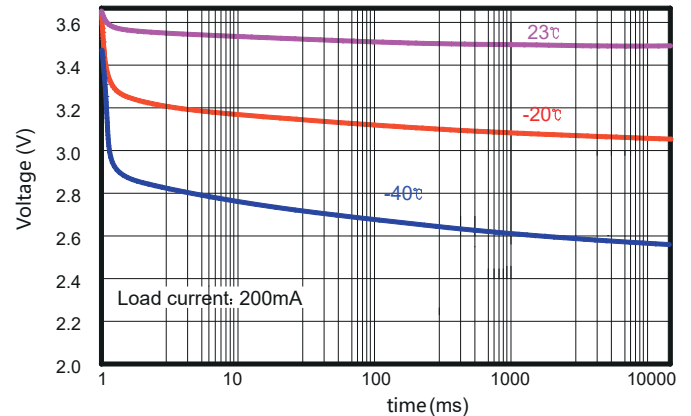

UPC1520 350mA Discharge Curve

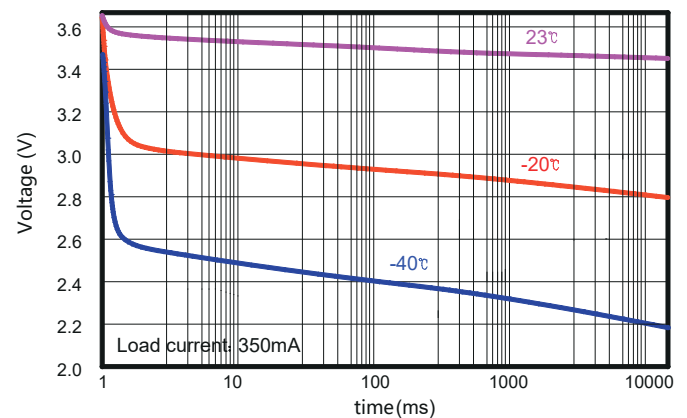

UPC1520 Capacity vs.OCV (50mA discharge at RT)

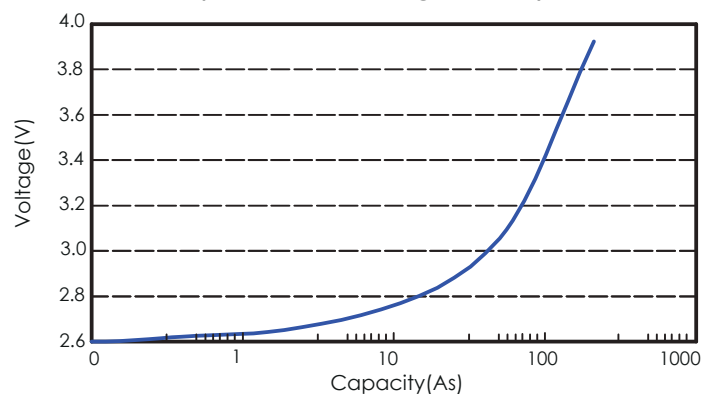

HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,
Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040
Tel: +86(0)27 83248452
Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com
Web: www.cnhcb.com
No.: HCB-MKT.PM-S[V2.0 2018 02]